


Cutting Combined Expander 剪切组合扩张器

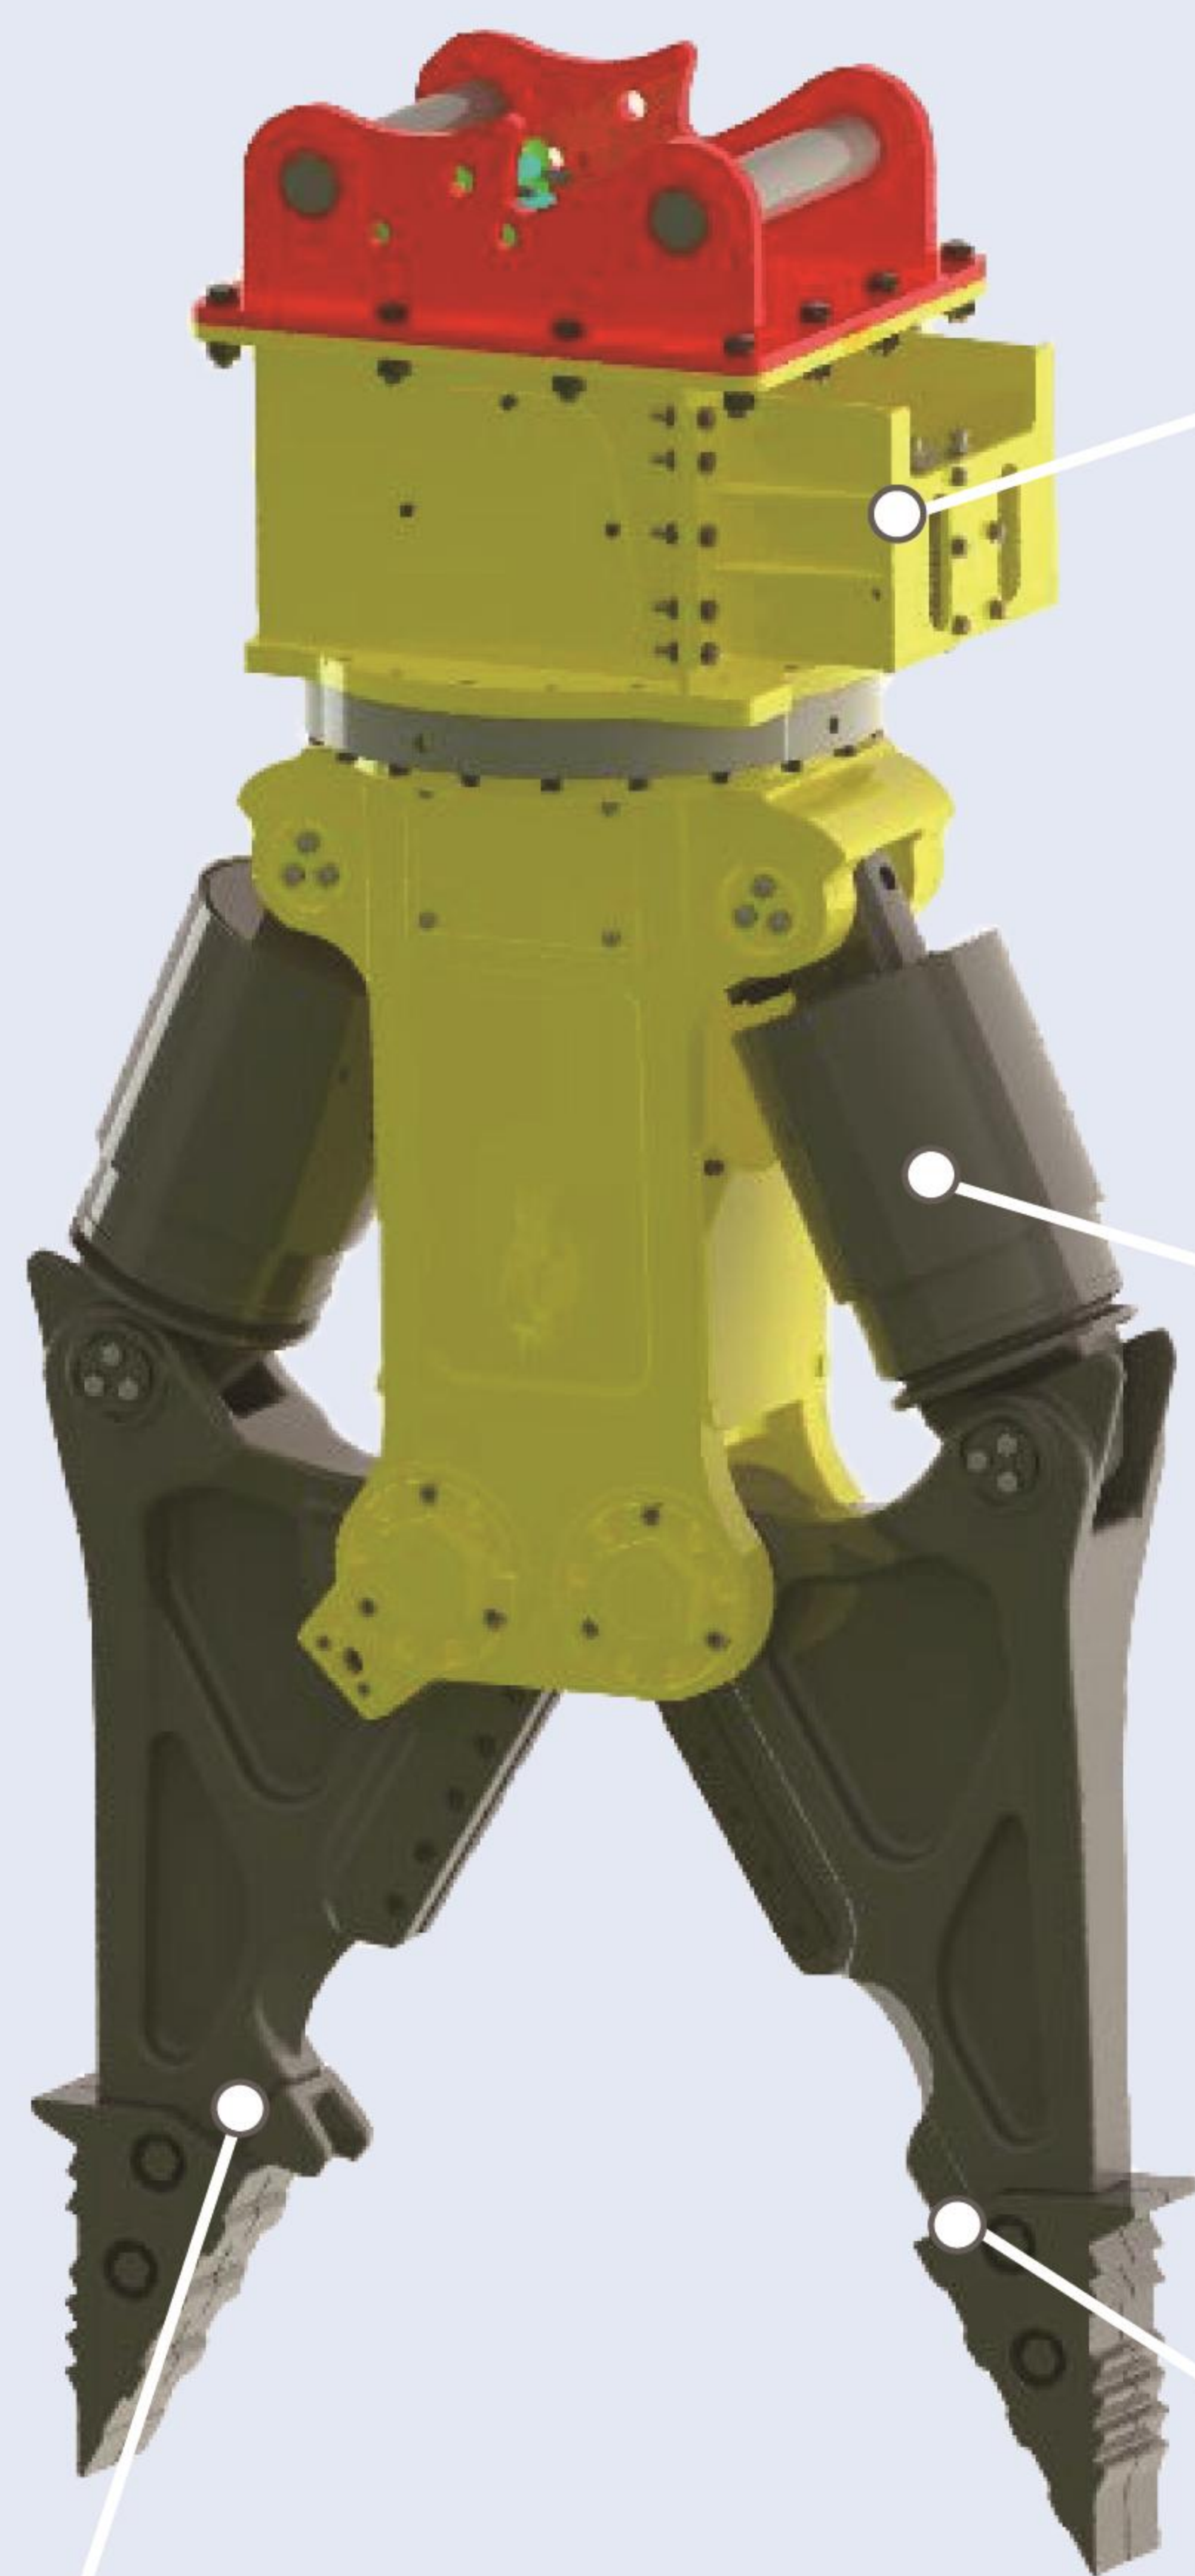

It adopts low-speed, high-torque hydraulic motor and high-quality rotary structure to achieve 360° degrees free rotation.

采用低转速、大扭矩液压马达驱动及高品质回转结构,实现360°无限制自由旋转。

The special high-strength and large-capacity oil cylinder is adopted to maximize the breaking shear force and expansion force while ensuring high strength.

采用特质高强度大容量油缸,在保证高强度的同时,实现破拆剪切力和扩张力最大化。

The special-structured jaw realize shearing, breaking and expansion. The expansion bucket tooth made of special material is super for opening holes.

装有特殊结构颚口,可实现剪切、破拆、扩张等多种功能,特殊材质的扩张斗齿结构对于各种结构和材质的开孔效果极佳

The overall structure is cast with alloy material, with high strength and impact resistance.

整体结构采用合金材质进行铸造,强度高、耐冲击。

Specifications 技术参数

M-CE20

Outline Dimension 外形尺寸	A	2820 mm
	B	1400 mm
	C	860 mm
	D	1200 mm
	E	360 mm
	L1	450 mm
	L2	730 mm
	L3	1390 mm
	L4	140 mm
	L5	685 mm
	L6	1175 mm
Weight	重量	1900-2000 kg
Closed Work Pressure	闭合作业压力	15-35 Mpa
Closed Work Flow	闭合作业流量	80-140 L/min
Rotating Working Pressure	旋转工作压力	14-16 Mpa
Rotating Working Flow	旋转工作流量	20-50 L/min
Max Crushing Force	最大剪切力	3800 kN
Breaking Force (End)	破拆力(末端)	900 kN
Extension Force (End)	扩展力(末端)	550 kN
Suitable Carrier	适配挖机吨位	20-25 ton

Outline Dimension 外形尺寸

